


# 2850/51 SERIES IP54

FOR USE IN: Underpasses



## Dimensions and Weights

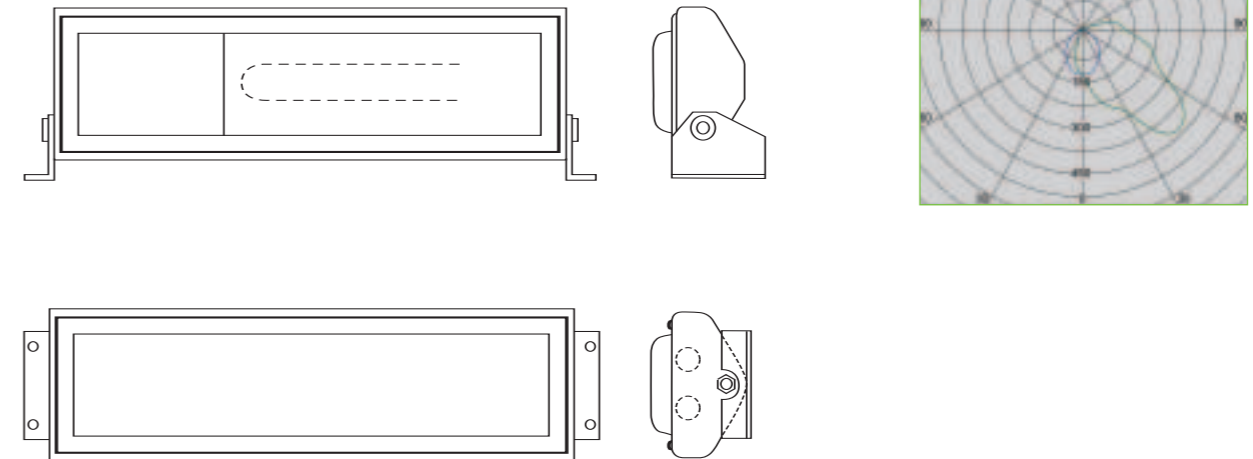

Type	Length mm	Width mm	Depth mm	Weight kg
1 x 35-90w SOX	801	241	160	*
1-2 x 18w TLD	801	241	160	*
1 x 18w-55w CFL	801	241	160	*
1 x 50-70w SON-T	801	241	160	*

\* Dependent upon option



Wall Symmetrical

## Key Features and Benefits

- **Symmetrical or asymmetrical lighting** Designed for surface mounting
- **Robust** galvanised steel construction for toughness and corrosion resistance
- **Easy, safe disconnection** The easily removable and interchangeable gear tray, galvanised with a touch-proof plug and socket (FMLB) on discharge circuits, or the combined optical and HF control gear on fluorescent circuits, speeds maintenance work
- **SON-T, SOX (tubular) compact or fluorescent lamps**  
The choice offers versatility and convenience
- **Excellent optical performance** Each lamp has its own optical system of high purity aluminium, symmetrical as standard, asymmetrical optional
- **IP54** Long service life is ensured and the body is sealed with a protected silicone O ring retained within the body channel
- **Simple installation and mounting**
- **Exceptionally high impact resistance** The rating of IK10 and 5mm UV stabilised, anti-graffiti polycarbonate diffuser ensure its integrity

- **Body sizes:** 1 body size as standard, in 2mm (average) gauge galvanised steel
- **Diffuser:** 5mm UV stabilised polycarbonate anti-graffiti
- **Finish:** Blue
- **Mounting:** External adjustable brackets
- **Supply:** Main incoming supply cable via M20 flame

- retardant cable gland 10-14mm diameter cable to a 3 pole termination block that is suitable for 2.5mm<sup>2</sup> conductors as standard
- **Control gear – discharge:** all PFC control gear mounted on removable tray – fluorescent: HF gear and optical system mounted on removable tray


## Order Codes

Description	CODE
1 x 35-90w SOX	*
1-2 x 18w TLD	
1 x 18w-55w CFL	
1 x 50-70w SON-T	

## Notes

\* Every 2850/51 luminaire is made to order and each type will have a particular and dedicated reference and weight.

**To specify state:** Exceptionally high impact rated (IK10) underpass luminaire with UV-stabilised polycarbonate cover and adjustable mounting brackets, as per WRTL 2850/51 Series.



**WRTL Exterior Lighting Ltd.** Waterside Park, Golds Hill Way, Tipton, West Midlands DY4 0PU, UK.  
Tel: +44 (0)121 521 1234 Web: [www.wrtl.co.uk](http://www.wrtl.co.uk)