

WRTL BOLLARD IP65

FOR USE IN: Pathways, walkways, urban spaces, piazzas




Key Features and Benefits

- **Robust, complies with BS EN 60598** The WRTL Bollard is good value and available in two sizes
- **IP65** Very good protection against weather for a long reliable life
- **Extruded aluminium housing** The tough and durable extruded aluminium housing has a very weather resistant black powder coated finish
- **Vandal resistant diffuser** The clear ribbed UV-resistant polycarbonate diffuser will withstand rough treatment
- **Versatility in lamp choice** The wide range of lamp types accommodated makes for a very versatile luminaire
- **Choice of bases** The zinc coated base plate is standard but a root mounted version is available for greater strength
- **Range of options** These include a 3 hour integral emergency version, photocell control and a white housing

- **Two body sizes:** Available in 500mm and 1100mm heights, extruded aluminium
- **Finish:** Black powder coated as standard
- **Lamp types:** 70W SON, 80W and 125W MBF/U and 2 x 18W TCD/CFL

Dimensions and Weights

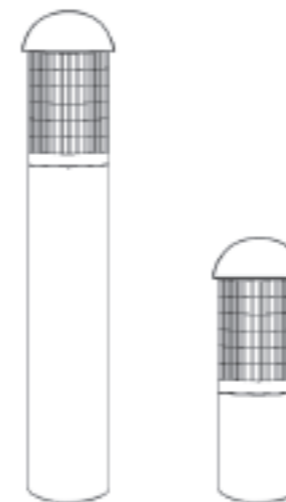

Typical Polar Curve

Type	Height mm	Diameter mm	Weight kg
500	500	180	5.8
1100	1100	180	8.5

Order Codes

Type	500mm	1100mm
70W SON	WRT5070	WRT11070
80W MBF/U	WRT5080	WRT11080
125W MBF/U	WRT50125	WRT110125
2 x 18W CFL	WRT50218	WRT110218

To specify state: IP65 rated, aluminium extruded bollard in various lamp types as per WRTL bollard.



WRTL Exterior Lighting Ltd, Waterside Park, Golds Hill Way, Tipton, West Midlands DY4 0PU, UK.
Tel: +44 (0)121 521 1234 Web: www.wrtl.co.uk